

DS-K1T6240 Series Portable Face Recognition Terminal



- 4.3-inch LCD touch screen, 2 Mega pixel wide-angle lens
- Built-in Lithium battery
- Recognition distance: 0.3 to 3 m
- Face recognition duration < 0.2 s/User
- Face recognition accuracy rate $\geq 99\%$
- Multiple authentication methods, including face, card, QR Code etc.
- Supports ISAPI, ISUP 5.0, TCP/IP (IPv4 and IPv6)



▪ Specification

System	
Operating system	Linux
Display	
Size	4.3 inch
Type	Touch Screen
Video	
Lens	Dual-lens
Resolution	2 MP
Video standard	PAL (Default) and NTSC
Network	
Wired network	10 M/100 M self-adaptive
Wi-Fi	Support (only DS-K1T6240MIWB-QR)
4G	Support(only DS-K1T6240MGB-QR)
Interface	
Network interface	1
Lock control	1
Exit button	1
Door contact input	1
Type-C USB	1
Sim card slot	1(only 4G version)
Capacity	
Face capacity	10,000
Card capacity	50,000
Event capacity	100,000
Authentication	
Face recognition accuracy rate	≥ 99%
Face recognition duration	< 0.2 s per person
Face recognition distance	0.3 to 3 m
Card type	Mifare 1 card
Card reading distance	0 ~ 3 cm
General	
Power supply	Built-in lithium battery or use 2 A (DC 12 V ~ DC 24 V)
Working environment	Indoor
Working humidity	10 to 90% (no condensing)
Working temperature	-10 °C ~ +50 °C
Installation	Wall mount or hand held

▪ Available Model

DS-K1T6240MIWB-QR, DS-K1T6240MGB-QR

▪ Dimension

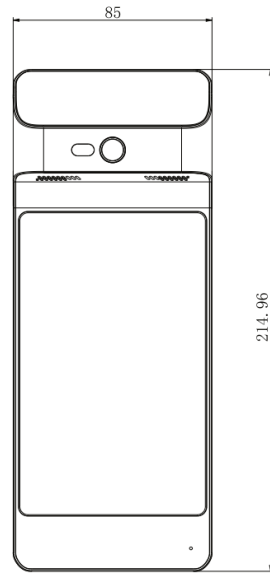

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

